

4" Submersible motors L4C Series

Submersible water filled encapsulated motors.



SPECIFICATIONS

- Stainless steel outer sleeve.
- Shaft extension and coupling dimensions to **NEMA** standards.
- **Class insulation:** 155 (F).
- **Protection class:** IP68.
- Internal fluid suitable for contact with foodstuffs.
- Strong and durable compensating bellows.
- Axial load supported by angular bearings.
- Mechanical seal protected by sand guard.
- **Maximum immersion depth:** 300 m.
- Suitable for both vertical / horizontal installations
- **Maximum number of starts per hour at regular intervals:** 40 for direct start; 20 for impedance start.
- **Maximum water temperature:** 35°C.
Max. temperature applies to motors working in a installation capable of delivering a flow of water around the motor jacket of at least 0,3 m/s.
- **Axial thrust:** 2000 N from 0,37 to 1,1 kW; 3000 N from 1,5 to 2,2 kW; 6000 N from 3 to 7,5 kW.

• Versions:

- Single-phase: from 0,37 to 4 kW (until 1,1 kW with built in automatic reset overload protection). 220-240 V ± 6% 50 Hz
- Three-phase: from 0,37 to 5,5 kW 220-240 V ± 6% 50 Hz from 0,37 to 7,5 kW 380-415 V ± 6% 50 Hz

OPTIONAL FEATURES

- Different voltages and frequencies
- Single-phase version up to 1,1 kW with built-in capacitor and motor protection (2W = Two Wire).
- Upper support with customized material.


For application limits, refer to technical appendix chapter.

ACCESSORIES

- Control panels.
- Drop cables.
- Coupling flanges.
- Cooling sleeves.
- Capacitors.

- **High starting torque**
- **Power supply cable with extractable connector**
- **Mechanical seal**
- **Kingsbury type thrust bearing**
- **Screws to fix the pump are included**


L4C MOTOR SERIES MOTOR CROSS SECTION AND TABLE OF MATERIALS

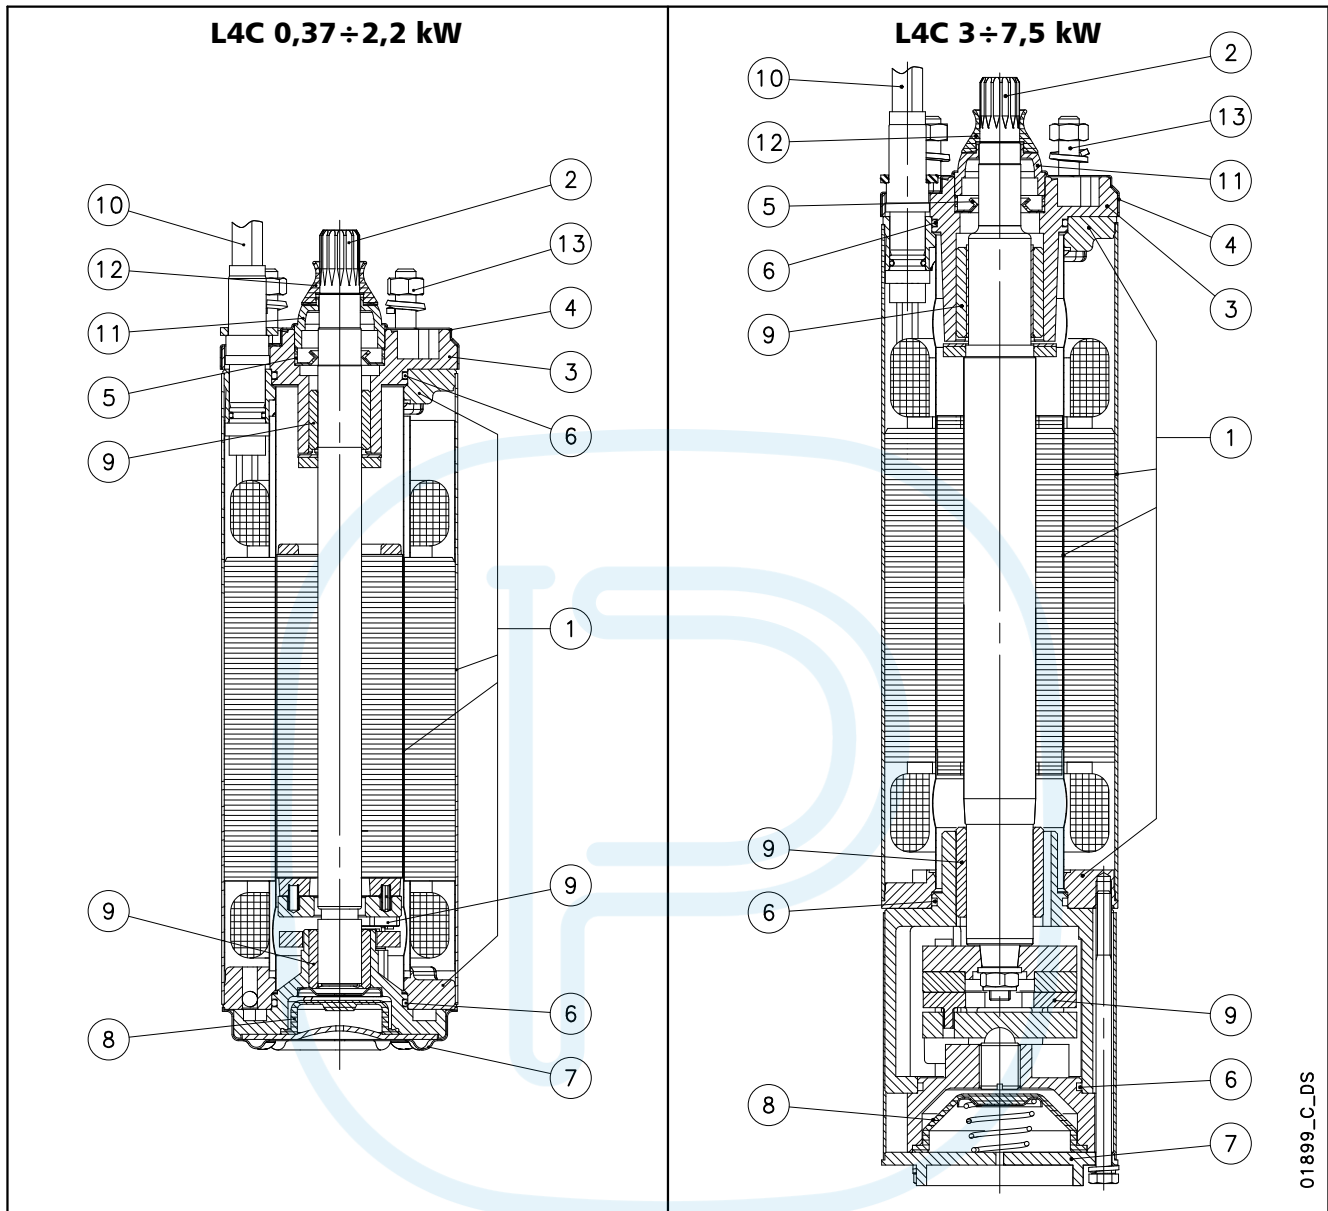

01899_C_DS

| REF N° | PART | MATERIAL | DESIGNATION | |
|--------|----------------------------------|----------------------------------|---------------------------------|------------|
| | | | EUROPE | USA |
| 1 | Inner, outer sleeves and flanges | Stainless steel | EN 10088-1-X2CrNi18-9 (1.4307) | AISI 304L |
| 2 | Shaft extension (up to 2.2 kW) | Stainless steel | EN 10088-1-X5CrNi18-10 (1.4301) | AISI 304 |
| | Shaft extension (from 3 kW) | Stainless steel | EN 10088-3-X3CrNiMoN27 (1.4460) | AISI 329 |
| 3 | Upper bracket | Cast iron | EN 1561-EN-GJL-200 (EN-JL1030) | Class 25 B |
| 4 | Upper cover | Stainless steel | EN 10088-1-X5CrNi18-10 (1.4301) | AISI 304 |
| 5 | Lip seal | NBR | | |
| 6 | Elastomers | NBR | | |
| 7 | Lower cover (up to 2.2 kW) | Stainless steel | EN 10088-1-X5CrNi18-10 (1.4301) | AISI 304 |
| | Lower cover (from 3 kW) | Cast iron | EN 1561-EN-GJL-200 (EN-JL1030) | Class 25 B |
| 8 | Compensating bellows | EPDM | | |
| 9 | Bearings | Carbon-graphite | | |
| 10 | Cable | EPDM | | |
| 11 | Fixed sand guard | PA6 | | |
| 12 | Removable sand guard | NBR | | |
| 13 | Bolts and screws | Stainless steel | EN ISO 3506-1 Grade A2 | |
| - | Cooling liquid | Demineralized water + antifreeze | | |

L4C MOTOR SERIES DIMENSIONS AND WEIGHTS AT 50 Hz

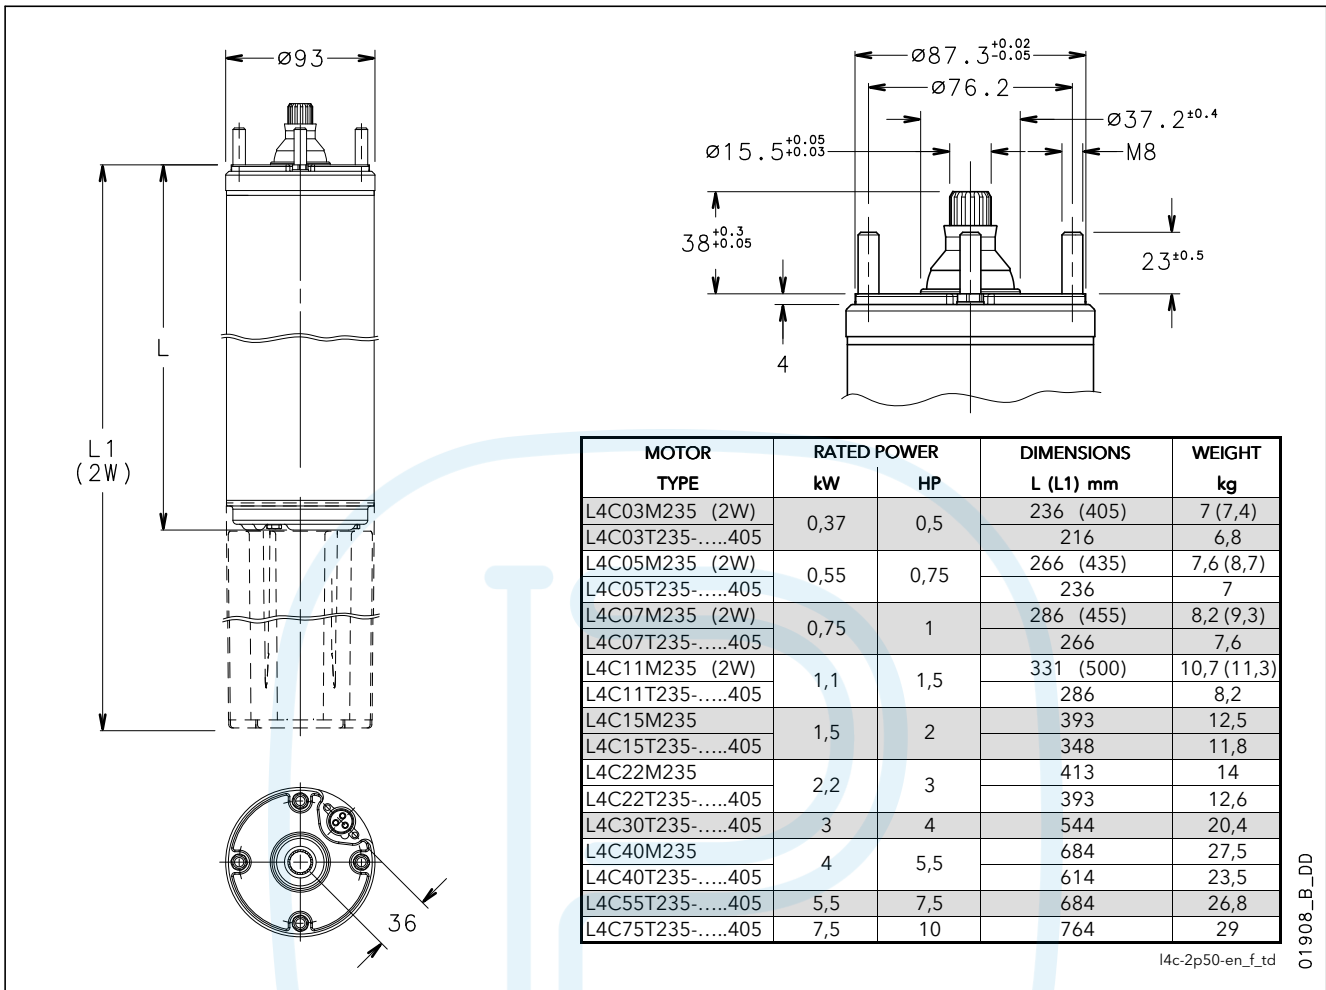

SINGLE-PHASE OPERATING CHARACTERISTICS AT 50 Hz

| MOTOR TYPE | RATED POWER | | RATED VOLTAGE | RATED CURRENT | CAPACITOR | OPERATING CHARACTERISTICS AT RATED POWER | | | DIRECT START | | MAX WATER TEMPERATURE | CABLE TYPE (FLAT) | |
|------------|-------------|------|---------------|---------------|-----------|--|-----|-------|--------------|-------|-----------------------|--------------------------|-----|
| | kW | HP | | | | rpm | η % | cos φ | Ts/Tn | Is/In | | 4G ... * mm ² | L m |
| L4C03M235* | 0,37 | 0,5 | 220 | 3,2 | 16 | 2810 | 53 | 0,96 | 0,63 | 2,68 | 35 | 1,5 | 1,7 |
| | | | 230 | 3,3 | | 2820 | 54 | 0,97 | 0,69 | 2,72 | | | |
| | | | 240 | 3,4 | | 2830 | 50 | 0,91 | 0,75 | 2,76 | | | |
| L4C05M235* | 0,55 | 0,75 | 220 | 4,3 | 20 | 2810 | 61 | 0,95 | 0,62 | 3,3 | 35 | 1,5 | 1,7 |
| | | | 230 | 4,6 | | 2820 | 56 | 0,94 | 0,68 | 3,2 | | | |
| | | | 240 | 4,8 | | 2830 | 54 | 0,90 | 0,74 | 3,26 | | | |
| L4C07M235* | 0,75 | 1 | 220 | 6 | 30 | 2810 | 60 | 0,93 | 0,63 | 3,18 | 35 | 1,5 | 1,7 |
| | | | 230 | 6,2 | | 2820 | 58 | 0,92 | 0,66 | 3,2 | | | |
| | | | 240 | 6,5 | | 2830 | 56 | 0,85 | 0,75 | 3,2 | | | |
| L4C11M235* | 1,1 | 1,5 | 220 | 8 | 40 | 2820 | 67 | 0,94 | 0,60 | 3,48 | 35 | 1,5 | 1,7 |
| | | | 230 | 8,1 | | 2835 | 65 | 0,92 | 0,60 | 3,54 | | | |
| | | | 240 | 8,3 | | 2850 | 63 | 0,87 | 0,62 | 3,62 | | | |
| L4C15M235 | 1,5 | 2 | 220 | 10,4 | 50 | 2800 | 67 | 0,96 | 0,74 | 3,3 | 35 | 1,5 | 1,7 |
| | | | 230 | 10,4 | | 2820 | 66 | 0,93 | 0,74 | 3,38 | | | |
| | | | 240 | 10,7 | | 2835 | 64 | 0,90 | 0,76 | 3,46 | | | |
| L4C22M235 | 2,2 | 3 | 220 | 15,4 | 70 | 2740 | 68 | 0,96 | 0,54 | 3,1 | 35 | 1,5 | 1,7 |
| | | | 230 | 15 | | 2770 | 68 | 0,94 | 0,54 | 3,2 | | | |
| | | | 240 | 15,3 | | 2790 | 66 | 0,91 | 0,54 | 3,3 | | | |
| L4C40M235 | 4 | 5,5 | 220 | 29,9 | 90 | 2820 | 70 | 0,93 | 0,46 | 3,5 | 35 | 2 | 2,7 |
| | | | 230 | 29,8 | | 2830 | 68 | 0,90 | 0,51 | 3,6 | | | |
| | | | 240 | 29,7 | | 2840 | 65 | 0,87 | 0,60 | 3,4 | | | |

Ts/Tn = ratio between starting torque and nominal torque.

Is/In = ratio between starting current and nominal current

l4cm-2p50-en_h_te

* Cable 3G for models L4C03M235/2W, L4C05M235/2W, L4C07M235/2W, L4C11M235/2W

L4C MOTOR SERIES THREE-PHASE OPERATING CHARACTERISTICS AT 50 Hz

| MOTOR TYPE | RATED POWER | | RATED VOLTAGE | RATED CURRENT | OPERATING CHARACTERISTICS AT RATED POWER | | | DIRECT STARTING | | MAX WATER TEMPERATURE | CABLE TYPE (FLAT) | |
|------------|-------------|------|---------------|---------------|--|----|------|-----------------|------------|-----------------------|-------------------|-------|
| | kW | HP | | | V | A | rpm | η % | cos ϕ | | Ts/Tn | Is/In |
| L4C03T235 | 0,37 | 0,5 | 220 | 2,6 | 2810 | 51 | 0,69 | 2,7 | 3,7 | 35 | 1,5 | 1,7 |
| | | | 230 | 2,7 | 2820 | 53 | 0,7 | 3 | 3,7 | | | |
| | | | 240 | 3,1 | 2830 | 48 | 0,67 | 3,2 | 3,4 | | | |
| L4C05T235 | 0,55 | 0,75 | 220 | 3,1 | 2820 | 61 | 0,77 | 2,8 | 4,3 | 35 | 1,5 | 1,7 |
| | | | 230 | 3,3 | 2830 | 60 | 0,71 | 3,1 | 4,2 | | | |
| | | | 240 | 3,5 | 2840 | 60 | 0,66 | 3,3 | 4,2 | | | |
| L4C07T235 | 0,75 | 1 | 220 | 4 | 2820 | 65 | 0,77 | 2,9 | 5 | 35 | 1,5 | 1,7 |
| | | | 230 | 4,1 | 2830 | 63 | 0,73 | 3,2 | 5,1 | | | |
| | | | 240 | 4,5 | 2840 | 63 | 0,66 | 3,5 | 4,8 | | | |
| L4C11T235 | 1,1 | 1,5 | 220 | 5,6 | 2820 | 62 | 0,8 | 3 | 4 | 35 | 1,5 | 1,7 |
| | | | 230 | 5,7 | 2830 | 64 | 0,76 | 3,3 | 4,2 | | | |
| | | | 240 | 6,2 | 2840 | 63 | 0,73 | 3,6 | 4 | | | |
| L4C15T235 | 1,5 | 2 | 220 | 7,4 | 2820 | 68 | 0,77 | 3,1 | 4,2 | 35 | 1,5 | 1,7 |
| | | | 230 | 7,6 | 2830 | 68 | 0,72 | 3,4 | 4,3 | | | |
| | | | 240 | 8 | 2840 | 67 | 0,68 | 3,7 | 4,3 | | | |
| L4C22T235 | 2,2 | 3 | 220 | 10 | 2810 | 72 | 0,8 | 3 | 4,3 | 35 | 1,5 | 1,7 |
| | | | 230 | 10,2 | 2820 | 71 | 0,78 | 3,2 | 4,4 | | | |
| | | | 240 | 10,7 | 2830 | 70 | 0,7 | 3,5 | 4,4 | | | |
| L4C30T235 | 3 | 4 | 220 | 13,7 | 2830 | 75 | 0,77 | 3 | 4,6 | 35 | 1,5 | 2,7 |
| | | | 230 | 14,3 | 2840 | 74 | 0,71 | 3,3 | 4,6 | | | |
| | | | 240 | 15,2 | 2850 | 70 | 0,68 | 3,5 | 4,5 | | | |
| L4C40T235 | 4 | 5,5 | 220 | 16,4 | 2840 | 76 | 0,81 | 3,10 | 5,6 | 35 | 2 | 2,7 |
| | | | 230 | 17,3 | 2850 | 75 | 0,79 | 3,40 | 5,6 | | | |
| | | | 240 | 18,2 | 2860 | 72 | 0,74 | 3,70 | 5,5 | | | |
| L4C55T235 | 5,5 | 7,5 | 220 | 23,4 | 2840 | 78 | 0,79 | 3 | 5,4 | 35 | 2 | 2,7 |
| | | | 230 | 24,2 | 2850 | 77 | 0,74 | 3,4 | 5,5 | | | |
| | | | 240 | 25 | 2860 | 76 | 0,7 | 3,6 | 5,5 | | | |
| L4C03T405 | 0,37 | 0,5 | 380 | 1,5 | 2810 | 51 | 0,69 | 2,7 | 3,8 | 35 | 1,5 | 1,7 |
| | | | 400 | 1,6 | 2820 | 53 | 0,7 | 3 | 3,8 | | | |
| | | | 415 | 1,8 | 2830 | 48 | 0,67 | 3,2 | 3,4 | | | |
| L4C05T405 | 0,55 | 0,75 | 380 | 1,8 | 2820 | 61 | 0,77 | 2,8 | 4,2 | 35 | 1,5 | 1,7 |
| | | | 400 | 1,9 | 2830 | 60 | 0,71 | 3,1 | 4,2 | | | |
| | | | 415 | 2 | 2840 | 60 | 0,66 | 3,3 | 4,1 | | | |
| L4C07T405 | 0,75 | 1 | 380 | 2,3 | 2820 | 65 | 0,77 | 2,9 | 5 | 35 | 1,5 | 1,7 |
| | | | 400 | 2,4 | 2830 | 63 | 0,73 | 3,2 | 5 | | | |
| | | | 415 | 2,6 | 2840 | 63 | 0,66 | 3,5 | 4,8 | | | |
| L4C11T405 | 1,1 | 1,5 | 380 | 3,3 | 2820 | 62 | 0,8 | 3 | 4 | 35 | 1,5 | 1,7 |
| | | | 400 | 3,4 | 2830 | 64 | 0,76 | 3,3 | 4,1 | | | |
| | | | 415 | 3,6 | 2840 | 63 | 0,73 | 3,6 | 4 | | | |
| L4C15T405 | 1,5 | 2 | 380 | 4,3 | 2820 | 68 | 0,77 | 3,1 | 4,2 | 35 | 1,5 | 1,7 |
| | | | 400 | 4,4 | 2830 | 68 | 0,72 | 3,4 | 4,3 | | | |
| | | | 415 | 4,6 | 2840 | 67 | 0,68 | 3,7 | 4,3 | | | |
| L4C22T405 | 2,2 | 3 | 380 | 5,8 | 2810 | 72 | 0,8 | 3 | 4,1 | 35 | 1,5 | 1,7 |
| | | | 400 | 5,9 | 2820 | 71 | 0,78 | 3,2 | 4,4 | | | |
| | | | 415 | 6,2 | 2830 | 70 | 0,7 | 3,5 | 4,3 | | | |
| L4C30T405 | 3 | 4 | 380 | 7,9 | 2830 | 75 | 0,77 | 3 | 4,5 | 35 | 1,5 | 2,7 |
| | | | 400 | 8,3 | 2840 | 74 | 0,71 | 3,3 | 4,6 | | | |
| | | | 415 | 8,8 | 2850 | 70 | 0,68 | 3,5 | 4,5 | | | |
| L4C40T405 | 4 | 5,5 | 380 | 9,5 | 2840 | 76 | 0,81 | 3,1 | 5,6 | 35 | 1,5 | 2,7 |
| | | | 400 | 10 | 2850 | 75 | 0,79 | 3,4 | 5,6 | | | |
| | | | 415 | 10,5 | 2860 | 72 | 0,74 | 3,7 | 5,5 | | | |
| L4C55T405 | 5,5 | 7,5 | 380 | 13,5 | 2840 | 78 | 0,79 | 3 | 5,4 | 35 | 1,5 | 2,7 |
| | | | 400 | 14 | 2850 | 77 | 0,74 | 3,4 | 5,5 | | | |
| | | | 415 | 14,5 | 2860 | 76 | 0,7 | 3,6 | 5,5 | | | |
| L4C75T405 | 7,5 | 10 | 380 | 17 | 2840 | 80 | 0,84 | 2,6 | 4,7 | 35 | 2 | 3,5 |
| | | | 400 | 17,4 | 2850 | 79 | 0,79 | 2,9 | 4,8 | | | |
| | | | 415 | 18,1 | 2860 | 76 | 0,75 | 3,1 | 4,8 | | | |

Ts/Tn = ratio between starting torque and nominal torque.

Is/In = ratio between starting current and nominal current

l4ct-2p50-en_d_te